

## SL30 | SURFACE &amp; SUSPENDED

Customisable linear lighting solution



## Product Description

Designed and made in Australia the SL30 is a completely customisable and versatile linear lighting solution. The magic of this luminaire is that it presents beautifully and performs brilliantly without imposing on the overall design aesthetic.

This amazing luminaire also features the option of a specifically engineered U diffuser to optimise vertical illuminance. Available with Variable Output Technology the SL30 ensures complete lighting control and performance for the user.

## Product Details

Absolute luminous flux p/m	756lm - 1900lm
System watts p/m	9W / 12W / 17W
Colour deviation	3 SDCM
Colour rendition Index	>80 / >90
Correlated colour temperature	3000K / 4000K
Cyanosis approval	Available with 90+ CRI 4000K
Lumen maintenance	L80B10 72,000hours
Dimming method	Non dimm / DALI / Casambi
Driver	Remote
Material	Extruded aluminium body, polycarbonate diffuser
Illumination	Direct
Optic	Opal flat diffuser / opal U diffuser
Mounting	Surface mounted / Suspended
Accessories	End caps / joiners / mitered corners / coverplate
Housing colour	Black / White / Custom
Length	Custom lengths made to order
Warranty	7 years
Country of origin	Australia

## CUSTOM LUMINAIRE MODIFICATIONS

2700K + 3500K  
 White tunable 2700K-6500K  
 RGBW  
 Screwless endcaps

## Product Variants

### TECHNICAL SPECIFICATIONS - 80+ CRI - FLAT DIFFUSER

Direct Illumination Flat Diffuser			
Delivered Lumens per 980mm	859	1186	1659
System Watts per meter	9	12	17
CRI	80+	80+	80+
LED's divisible by	140mm	140mm	140mm

### TECHNICAL SPECIFICATIONS - 90+ CRI - FLAT DIFFUSER

Direct Illumination Flat Diffuser			
Delivered Lumens per 980mm	756	1043	1454
System Watts per meter	9	12	17
CRI	90+	90+	90+
LED's divisible by	140mm	140mm	140mm

### TECHNICAL SPECIFICATIONS - 80+ CRI - U DIFFUSER


Direct Illumination U Diffuser			
Delivered Lumens per 980mm	984	1358	1900
System Watts per meter	9	12	17
CRI	80+	80+	80+
LED's divisible by	140mm	140mm	140mm

### TECHNICAL SPECIFICATIONS - 90+ CRI - U DIFFUSER

Direct Illumination U Diffuser			
Delivered Lumens per 980mm	829	1144	1595
System Watts per meter	9	12	17
CRI	90+	90+	90+
LED's divisible by	140mm	140mm	140mm

## HOW TO ORDER

SL30	.	17	.	93	.	F	.	XXXX	.	61	.	W
profile		wattage per meter down		CRI CCT		lens type		profile length in mm		dimming type		colour finish

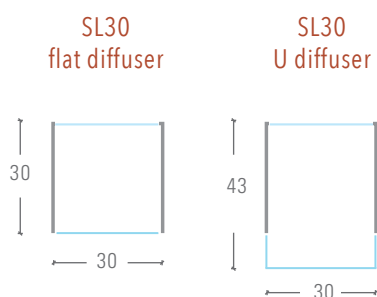

## OTHER LUMINAIRES WITHIN THE FAMILY

Nano 7  
 Nano 15  
 SL 30  
 UD 30  
 SL 40  
 UD 50  
 System 50  
 System 60  
 System 66  
 Loop 80  
 Valley 78



Australian made like nothing **ELSe.**