

SL30 ADVANCED | SURFACE & SUSPENDED

Customisable linear lighting solution



Product Description

Designed and made in Australia the SL 30 Advanced is a completely customisable and versatile linear lighting solution. Quality of light is key to the design of the luminaires with the option to specify a specifically engineered 'Full Spectrum' version designed to minimise potential negative effects of artificial lighting to people, pets and plants.

This amazing luminaire also features the option of a specifically engineered U diffuser to optimise vertical illuminance.

Product Details

| | |
|-------------------------------|---|
| Absolute luminous flux p/m | 496lm - 1278lm |
| System watts p/m | 13W /25W |
| Colour deviation | 2 SDCM |
| Colour rendition Index | >95 |
| Correlated colour temperature | Static White - 3000K / 4000K, Full Spectrum - 4000K |
| Cyanosis approval | Available with CRI 4000K |
| Dimming method | Non dimm / DALI / Casambi |
| Driver | Remote |
| Material | Extruded aluminium body, polycarbonate diffuser |
| Illumination | Direct |
| Optic | Opal flat diffuser / opal U diffuser |
| Mounting | Surface mounted / Suspended |
| Accessories | End caps / joiners / mitered corners / coverplate |
| Housing colour | Black / White / Custom |
| Length | Custom lengths made to order |
| Warranty | 10 years |
| Colour consistency warranty | 10 years |
| Country of origin | Australia |

CUSTOM LUMINAIRE MODIFICATIONS

2700K + 3500K
 IP54
 Screwless endcaps

Product Variants

TECHNICAL SPECIFICATIONS - 80+ CRI - FLAT DIFFUSER

| Direct Illumination Flat Diffuser | | | |
|-----------------------------------|-------|-------|-------|
| Delivered Lumens per 980mm | 859 | 1186 | 1659 |
| System Watts per meter | 9 | 12 | 17 |
| CRI | 80+ | 80+ | 80+ |
| LED's divisible by | 140mm | 140mm | 140mm |

TECHNICAL SPECIFICATIONS - 90+ CRI - FLAT DIFFUSER

| Direct Illumination Flat Diffuser | | | |
|-----------------------------------|-------|-------|-------|
| Delivered Lumens per 980mm | 756 | 1043 | 1454 |
| System Watts per meter | 9 | 12 | 17 |
| CRI | 90+ | 90+ | 90+ |
| LED's divisible by | 140mm | 140mm | 140mm |


TECHNICAL SPECIFICATIONS - 80+ CRI - U DIFFUSER

| Direct Illumination U Diffuser | | | |
|--------------------------------|-------|-------|-------|
| Delivered Lumens per 980mm | 984 | 1358 | 1900 |
| System Watts per meter | 9 | 12 | 17 |
| CRI | 80+ | 80+ | 80+ |
| LED's divisible by | 140mm | 140mm | 140mm |


TECHNICAL SPECIFICATIONS - 90+ CRI - U DIFFUSER

| Direct Illumination U Diffuser | | | |
|--------------------------------|-------|-------|-------|
| Delivered Lumens per 980mm | 829 | 1144 | 1595 |
| System Watts per meter | 9 | 12 | 17 |
| CRI | 90+ | 90+ | 90+ |
| LED's divisible by | 140mm | 140mm | 140mm |


HOW TO ORDER

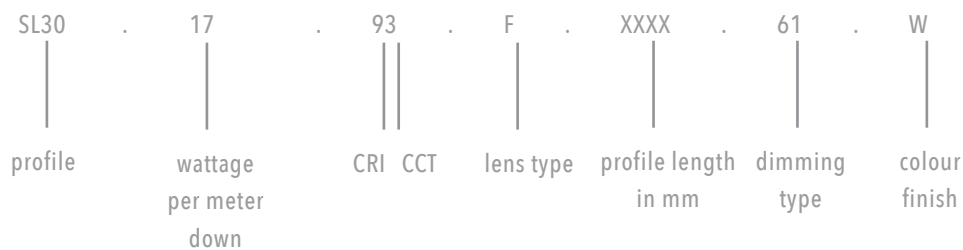

SL30
flat diffuser



SL30
U diffuser



OTHER LUMINAIRES WITHIN THE FAMILY

- Nano 7
- Nano 15
- SL 30
- UD 30
- SL 40
- UD 50
- System 50
- System 60
- System 66
- Loop 80
- Valley 78



Australian made like nothing ELS^e.