


SL40 ADVANCED | RECESSED

Customisable linear lighting solution

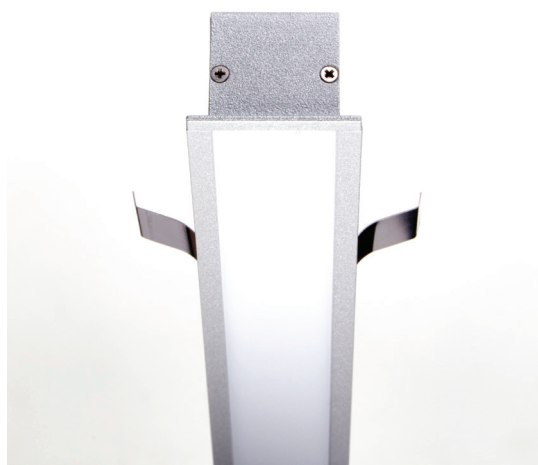

Product Description

Designed and made in Australia the SL 40 Advanced is a completely customisable and versatile linear lighting solution. Quality of light is key to the design of the luminaires with the option to specify a specifically engineered 'Full Spectrum' version designed to minimise potential negative effects of artificial lighting to people, pets and plants.

This amazing luminaire also features the option of a specifically engineered U diffuser to optimise vertical illuminance.

Product Details

Absolute luminous flux p/m	496lm - 1278lm
System watts p/m	13W /25W
Colour deviation	2 SDCM
Colour rendition Index	>95
Correlated colour temperature	Static White - 3000K / 4000K, Full Spectrum - 4000K
Cyanosis approval	Available with CRI 4000K
Dimming method	Non dimm / DALI / Casambi
Driver	Remote
Material	Extruded aluminium body, polycarbonate diffuser
Illumination	Direct
Optic	Opal flat diffuser / opal U diffuser
Mounting	Recessed
Accessories	End caps / joiners / mitered corners / coverplate
Housing colour	Black / White / Custom
Length	Custom lengths made to order
Warranty	10 years
Colour consistency warranty	10 years
Country of origin	Australia

CUSTOM LUMINAIRE MODIFICATIONS

2700K + 3500K
IP54
Screwless endcaps

Product Variants

TECHNICAL SPECIFICATIONS - STATIC WHITE - FLAT DIFFUSER

Direct Illumination Flat Diffuser		
Delivered Lumens per 1000mm	593	1141
System Watts per meter	13	25
CRI	95+	95+
LED's divisible by	25mm	25mm

TECHNICAL SPECIFICATIONS - STATIC WHITE - U DIFFUSER

Direct Illumination U Diffuser		
Delivered Lumens per 1000mm	665	1278
System Watts per meter	13	25
CRI	95+	95+
LED's divisible by	25mm	25mm

TECHNICAL SPECIFICATIONS - FULL SPECTRUM - FLAT DIFFUSER


Direct Illumination Flat Diffuser		
Delivered Lumens per 1000mm	506	879
System Watts per meter	13	25
CRI	95+	95+
LED's divisible by	50mm	50mm

TECHNICAL SPECIFICATIONS - FULL SPECTRUM - U DIFFUSER

Direct Illumination U Diffuser		
Delivered Lumens per 1000mm	567	985
System Watts per meter	13	25
CRI	95+	95+
LED's divisible by	50mm	50mm

HOW TO ORDER

SL40	.	25	.	93	.	F	.	XXXX	.	61	.	W
profile		wattage per meter down		CRI CCT		lens type		profile length in mm		dimming type		colour finish

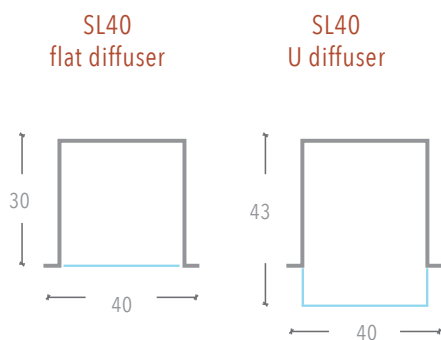

OTHER LUMINAIRES WITHIN THE FAMILY

SL 30 ADV
SL 40 ADV
UD 50 ADV
System 50 ADV
System 66 ADV
Valley 78 ADV



Australian made like nothing **ELSe.**