

UD30 | SUSPENDED

Customisable linear lighting solution



Product Description

Designed and made in Australia the UD30 is a completely customisable and versatile linear lighting solution. The magic of this luminaire is that it presents beautifully and performs brilliantly without imposing on the overall design aesthetic.

This amazing luminaire also features the option of a specifically engineered U diffuser to optimise vertical illuminance. Available with Variable Output Technology the UD30 ensures complete lighting control and performance for the user.

Product Details

Absolute luminous flux p/m	759lm - 1939lm
System watts p/m	9W / 12W / 17W
Colour deviation	3 SDCM
Colour rendition Index	>80 / >90
Correlated colour temperature	3000K / 4000K
Cyanosis approval	Available with 90+CRI 4000K
Lumen maintenance	L80B10 72,000hours
Dimming method	Non dimm / DALI / Casambi
Driver	Remote
Material	Extruded aluminium body, polycarbonate diffuser
Illumination	Direct or direct / indirect
Optic	Opal flat diffuser / opal U diffuser
Mounting	Suspended
Accessories	End caps / joiners / mitered corners / coverplate
Housing colour	Black / White / Custom
Length	Custom lengths made to order
Warranty	7 years
Country of origin	Australia

CUSTOM LUMINAIRE MODIFICATIONS

2700K + 3500K
 White tunable 2700K-6500K
 RGBW
 Screwless endcaps

Product Variants

TECHNICAL SPECIFICATIONS - 80+ CRI - FLAT DIFFUSER

Direct Illumination Flat Diffuser			
Delivered Lumens per 980mm	859	1186	1659
System Watts per meter	9	12	17
CRI	80+	80+	80+
LED's divisible by	140mm	140mm	140mm

TECHNICAL SPECIFICATIONS - 90+ CRI - FLAT DIFFUSER

Direct Illumination Flat Diffuser			
Delivered Lumens per 980mm	756	1043	1454
System Watts per meter	9	12	17
CRI	90+	90+	90+
LED's divisible by	140mm	140mm	140mm

TECHNICAL SPECIFICATIONS - 80+ CRI - U DIFFUSER

Direct Illumination U Diffuser			
Delivered Lumens per 980mm	984	1358	1900
System Watts per meter	9	12	17
CRI	80+	80+	80+
LED's divisible by	140mm	140mm	140mm



TECHNICAL SPECIFICATIONS - 90+ CRI - U DIFFUSER

Direct Illumination U Diffuser			
Delivered Lumens per 980mm	829	1144	1595
System Watts per meter	9	12	17
CRI	90+	90+	90+
LED's divisible by	140mm	140mm	140mm

TECHNICAL SPECIFICATIONS - UPWARD ILLUMINATION

Indirect Illumination			
Delivered Lumens per 980mm	340	389	
System Watts per meter	6	8	
CRI	80+	90+	
LED's divisible by	100mm	50mm	

HOW TO ORDER

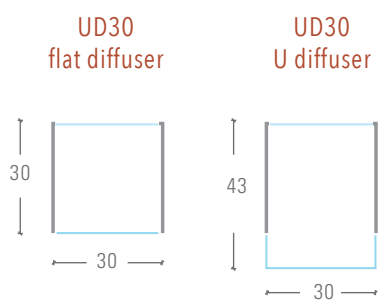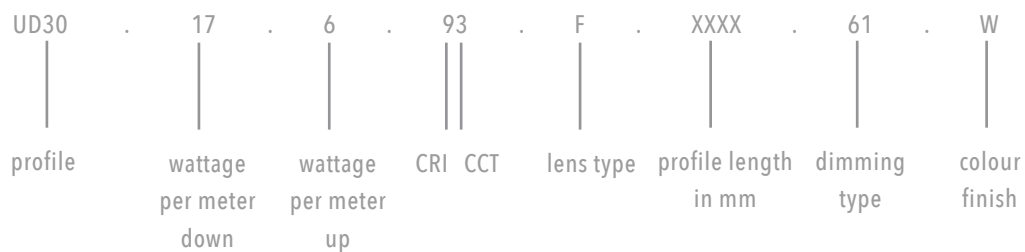

OTHER LUMINAIRES WITHIN THE FAMILY

Nano 7
 Nano 15
 SL 30
 UD 30
 SL 40
 UD 50
 System 50
 System 60
 System 66
 Loop 80
 Valley 78



Australian made like nothing **ELS**e.