

ICONIC | PROJECTOR

Premium IP66 exterior projector luminaire



Product Description

Designed and manufactured in Australia to withstand the harsh Australian conditions the Iconic Projector is IP66 rated.

Presenting a sleek miniature style, the Iconic Projector features a variety of optics, accessories and outputs. Whether highlighting an architectural structure in RGBW or a discreetly illuminating a landscape in Amber that is home to wildlife the Iconic Projector is perfect for the job.

Product Details

Absolute luminous flux	357lm - 755lm
System watts	6W / 8W / 11W
Luminaire efficacy	up to 74lm/W
Colour rendition Index	80+
Correlated colour temperature	Amber/ 2700K / 3000K / 4000K / RGBW
Lumen maintenance	L90 87,000hours
Dimming method	Non dimm / DALI / DMX
Optic	PMMA Clear Lens
Beam angle	8° / 14° / 22° / 40° / Asymmetric / Linear / Oval
Luminaire housing	Aluminium
Luminaire housing colour	Clear anodised / Gunmetal anodised / Gold anodised
Custom body finishes	Custom anodised colour
IP Rating	IP66
Voltage	24V
Power Supply	Sold separately
Country of origin	Australia

CUSTOM LUMINAIRE MODIFICATIONS

2700K colour temperature
Amber LED

OPTIONAL ACCESSORIES

GLARE SHIELD
IGL10.GLARE.SHIELD


GROUND SPIKE
IGL10.GROUND.SPIKE

Product Variants

HOW TO SPECIFY


FIXED CCT

Select from the available options to configure luminaire

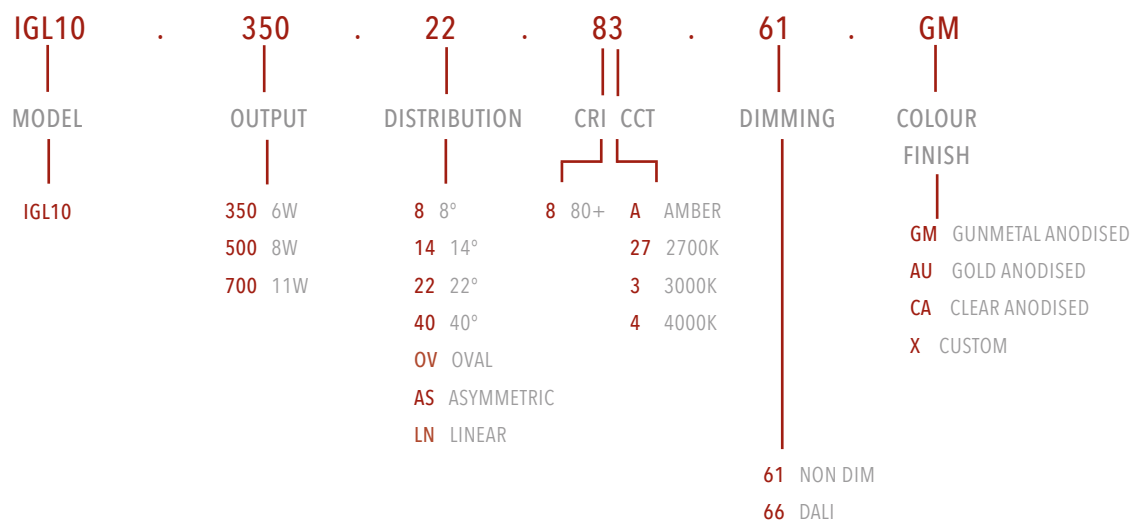


RGBW

Select from the available options to configure luminaire

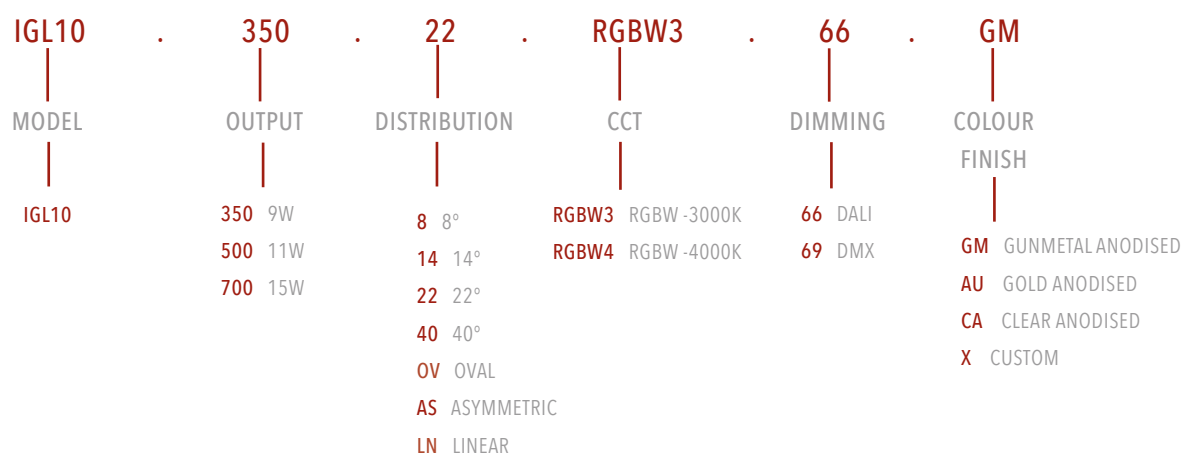

Product Variants

WIRING SPECIFICATIONS

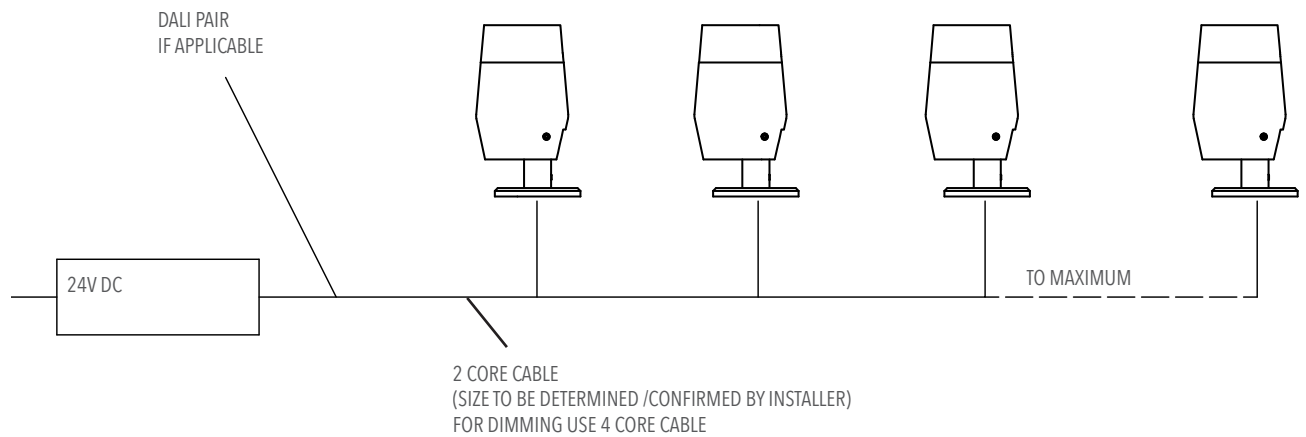


MAXIMUM QTY PER POWER SUPPLY / MAX CABLE DISTANCE

Manufacturer	Model	350mA	500mA	700mA	2.5mm SQ (m)	4mm SQ (m)	6mm SQ (m)
Meanwell	HLG-40H-24	6	4	3	45	75	115
Meanwell	HLG-60H-24	9	7	5	25	45	65
Meanwell	HLG-150H-24	24	18	12	12	19	25

Product Variants

TECHNICAL SPECIFICATIONS

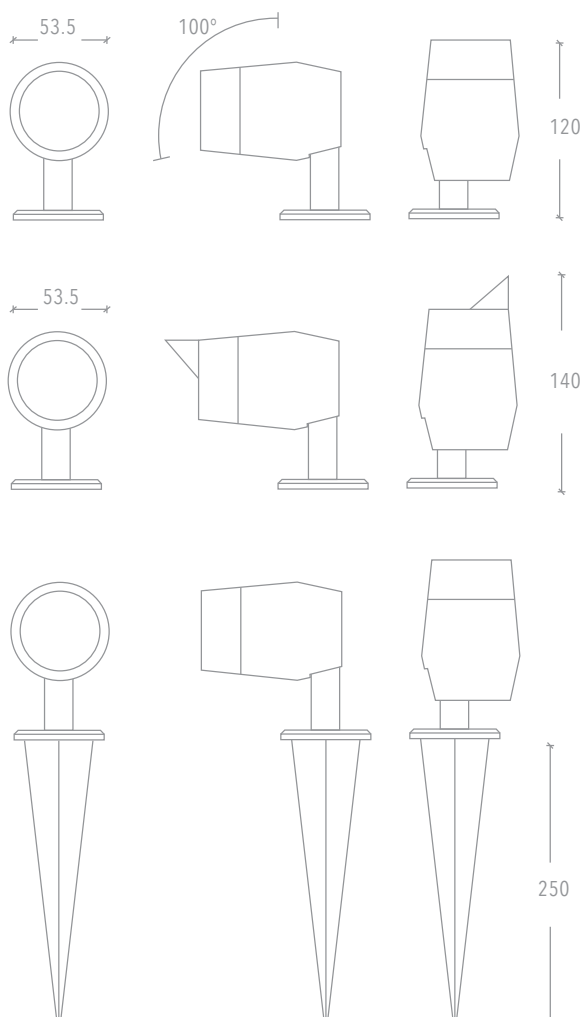

OTHER LUMINAIRES WITHIN THE FAMILY

- Iconic Inground
- Iconic Recessed Ceiling
- Iconic Inwall
- Iconic Inwall Eyelid



Australian made like nothing **ELS**e.