

ICONIC | WALL

Premium IP66 exterior in-wall luminaire



Product Description

Designed and manufactured in Australia to withstand the harsh Australian conditions the Iconic In-wall luminaire is IP66 rated.

Presenting a sleek miniature style, the Iconic In-wall features a variety of optics, accessories and outputs. Whether highlighting a garden or a discreetly illuminating a walkway in Amber that is home to wildlife the Iconic In-wall is perfect for the job.

Product Details

Absolute luminous flux	357lm - 755lm
System watts	6W / 8W / 11W
Luminaire efficacy	up to 74lm/W
Colour rendition Index	80+
Correlated colour temperature	Amber/ 2700K / 3000K / 4000K / RGBW
Lumen maintenance	L90 87,000hours
Dimming method	Non dimm / DALI / DMX
Optic	PMMA Clear Lens
Beam angle	8° / 14° / 22° / 40° / Asymmetric / Linear / Oval
Luminaire housing	Aluminium
Luminaire housing colour	Clear anodised / Gunmetal anodised / Gold anodised
Custom body finishes	Custom anodised colour
IP Rating	IP66
Voltage	24V
Power Supply	Sold separately
Country of origin	Australia


CUSTOM LUMINAIRE MODIFICATIONS

2700K colour temperature
Amber LED


Product Variants HOW TO SPECIFY

FIXED CCT

Select from the available options to configure luminaire

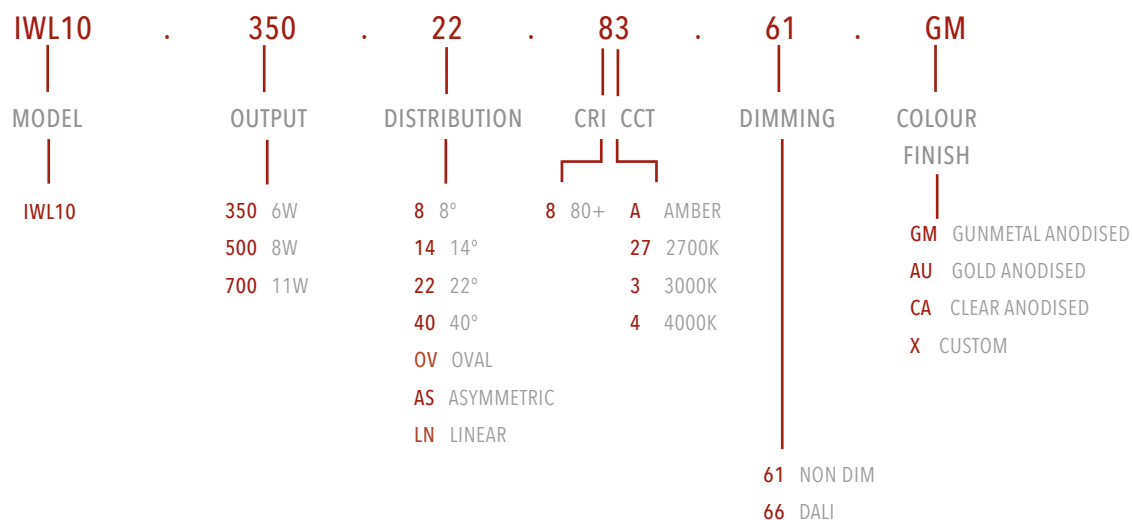

WIRING SPECIFICATIONS

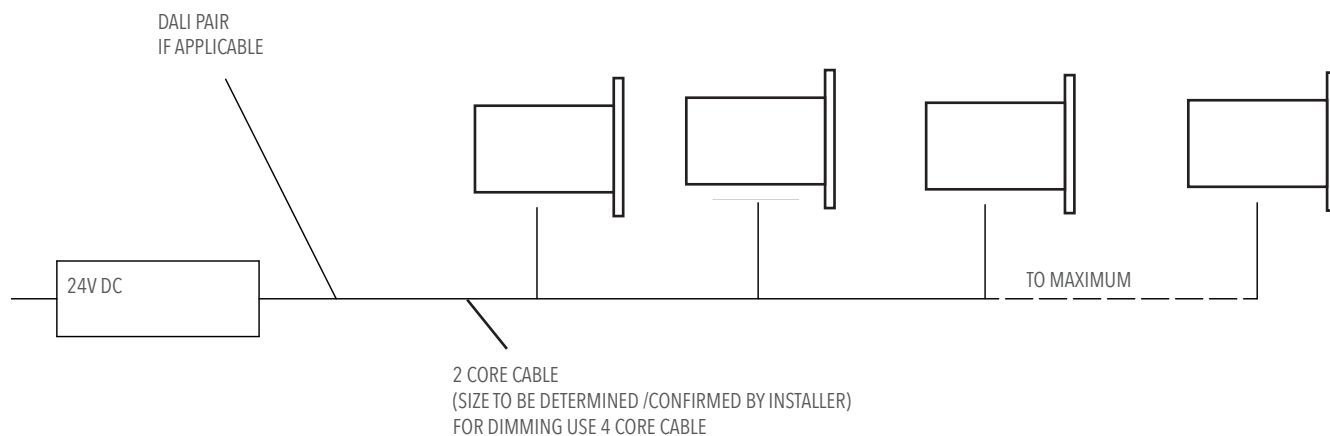

MAXIMUM QTY PER POWER SUPPLY / MAX CABLE DISTANCE (FIXED COLOUR ONLY)

Manufacturer	Model	350mA	500mA	700mA	2.5mm SQ (m)	4mm SQ (m)	6mm SQ (m)
Meanwell	HLG-40H-24	6	4	3	45	75	115
Meanwell	HLG-60H-24	9	7	5	25	45	65
Meanwell	HLG-150H-24	24	18	12	12	19	25

Product Variants HOW TO SPECIFY

RGBW

Select from the available options to configure luminaire

IWL10	.	350	.	22	.	RGBW3	.	66	.	GM
MODEL		OUTPUT		DISTRIBUTION		CCT		DIMMING		COLOUR FINISH
IWL10		350 9W 500 11W 700 15W		8 8° 14 14° 22 22° 40 40° OV OVAL AS ASYMMETRIC LN LINEAR		RGBW3 RGBW -3000K RGBW4 RGBW -4000K		66 DALI 69 DMX		GM GUNMETAL ANODISED AU GOLD ANODISED CA CLEAR ANODISED X CUSTOM

Product Variants HOW TO SPECIFY


RGBW

Select from the available options to configure luminaire

IWL10	350	22	RGBW3	66	GM
MODEL	OUTPUT	DISTRIBUTION	CCT	DIMMING	COLOUR FINISH
IWL10	350 9W 500 11W 700 15W	8 8° 14 14° 22 22° 40 40° OV OVAL AS ASYMMETRIC LN LINEAR	RGBW3 RGBW -3000K RGBW4 RGBW -4000K	66 DALI 69 DMX	GM GUNMETAL ANODISED AU GOLD ANODISED CA CLEAR ANODISED X CUSTOM

Product Variants

TECHNICAL SPECIFICATIONS

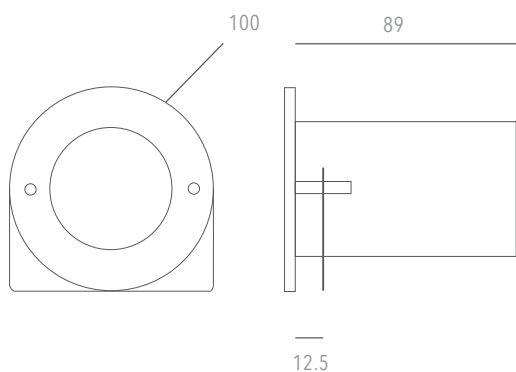

OTHER LUMINAIRES WITHIN THE FAMILY

- Iconic Projector
- Iconic Recessed Ceiling
- Iconic Inground
- Iconic Inwall Eyelid



Australian made like nothing **ELS**e.