

# FLEX 50 TRACKSPOT | LENS

Premium track mounted luminaire with lens technology



## Product Description

With an echo to classic designs of the past, but with an eye firmly on the future the Flex Trackspot 50 offers perfect versatility and performance in any environment where both spot and track lighting is the preferred solution. Presenting in a sleek, modern cylindrical housing this luminaire is available with Variable Output Technology to optimise performance to exact project requirements and power usage.

Flexible Optic Technology enables the Flex Trackspot 50 to deliver more accurate optics by offering flexibility to mix and match primary optics with secondary lenses and anti glare accessories to achieve the perfect results.

## Product Details

Absolute luminous flux	538lm - 1155m
System watts	6W / 8W / 10W / 12W / 14W
Luminaire efficacy	up to 96lm/W
Colour deviation	2 SDCM
Colour rendition Index	>95
Correlated colour temperature	2700K / 3000K / 3500K / 4000K
Lumen maintenance	L90B10 90,000hours
Dimming method	Non dimm / DALI / Casambi
Optic	PMMA Clear Lens
Beam angle	16° / 24° / 33° / 55° / Oval / Asymmetric / Linear / Zoom
Luminaire housing	Aluminium Powdercoated
Luminaire housing colour	Black / White / Custom
Luminaire baffle colour	Black
Custom body finishes	Custom powdercoat colour
Country of origin	Australia
Warranty	7 years

## OPTIONAL ACCESSORIES



**HONEYCOMB LOUVRE**  
FFL50.HONEYCOMB

Used to provide additional glare control in sensitive areas. Easily installed by placing behind the luminaire baffle.



**SPECIALTY COLOUR FILTER**  
FFL50.COLOUR.XXX

High quality borosilicate glass filters for premium colourfast performance. Available in a selection of colours. Easily installed by placing behind the luminaire baffle.



**XL BAFFLE**  
FPL50.XLB

A deep 17mm baffle to provide extra visual comfort in sensitive areas. Supplied in black as standard. Supplied in place of the standard baffle. Easily retrofitted by removing the existing baffle



**HALO RING**  
FPL50.HALO

A discreet 7mm glowing ring attachment that emits a soft glowing light. Supplied in place of the standard baffle. Easily retrofitted by removing the existing baffle.



**ANGLE SNOOT**  
FFL50.ANGLE SNOOT


Used to provide extra glare control or additional defined light control along with reducing beam distributions to a narrower spot



**STRAIGHT SNOOT**  
FFL50.ANGLE SNOOT

Used to provide extra glare control or additional defined light control along with reducing beam distributions to a narrower spot

## TECHNICAL SPECIFICATIONS




## Product Variants

### HOW TO SPECIFY

#### FIXED CCT

Select from the available options to configure luminaire

<b>FTL50</b>	<b>250</b>	<b>55</b>	<b>93</b>	<b>66</b>	<b>W</b>
MODEL	OUTPUT	DISTRIBUTION	CRI CCT	DIMMING	COLOUR FINISH
FTL50	150 6W - 538lm 200 8W - 703lm 250 10W - 860lm 300 12W - 1009lm 350 14W - 1155lm	16 16° 24 24° 33 33° 55 55° OV OVAL 20°x60° AS ASYMMETRIC LN LINEAR ZM ZOOM 20°- 42°	9 95+ 27 2700K 3 3000K 35 3500K 4 4000K	61 NON DIM 66 DALI 68 CASAMBI	W WHITE B BLACK X CUSTOM

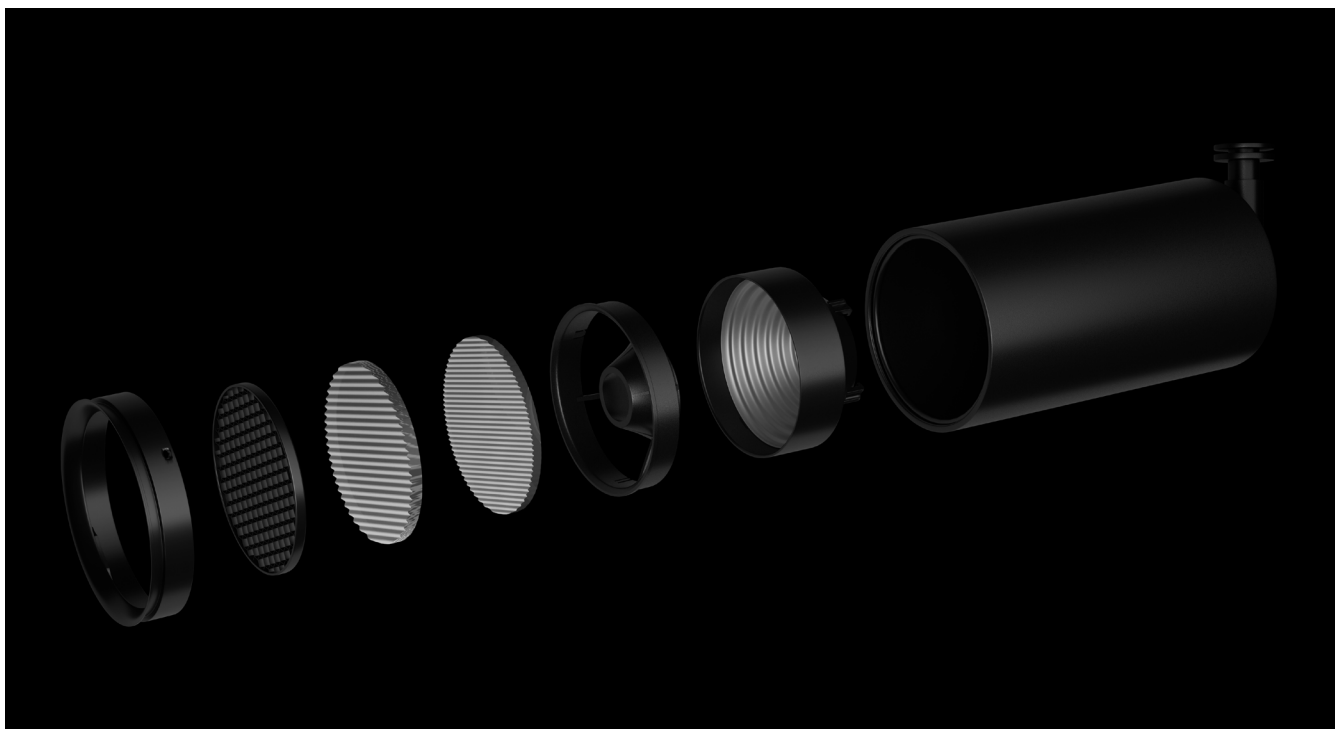

## OTHER LUMINAIRES WITHIN THE FAMILY

- Flex Trimless
- Flex Fixed 50 Recessed
- Flex Adjustable 50 Recessed
- Flex 50 Surface
- Flex 50 Pendant
- Flex 50 Trackspot
- Flex Fixed 70 Recessed
- Flex Adjustable 70 Recessed
- Flex 70 Surface Mini
- Flex 70 Surface
- Flex 70 Pendant Mini
- Flex 70 Pendant
- Flex 70 Pendant Double
- Flex 70 Trackspot
- Flex 70 Wall Double
- Flex 70 Wall Single
- Flex 100 Mini Surface
- Flex 100 Mini Pendant
- Flex 150 Mini Surface



Australian made like nothing **ELS**e.