

FLEX 70 TRACK DOWNLIGHT | LENS

Premium miniature downlight for track with lens technology



Product Description

Flex by name and Flex by design. The Flex 70 Mini track downlight luminaire is the newest member of the Flex Range.

Flexible, movable lighting has become an integral part of modern interior design and multi functional spaces. The Flex 70 Mini Track downlight provides all the features of a recessed or surface mounted luminaire while providing optimum flexibility and longevity of a space.

Featuring optics that ensure exceptional glare control, a swathe of accessories and variable output technology to optimise performance the Flex 70 Mini track downlight is the perfect choice for modern flexible interiors.

Product Details

Absolute luminous flux	743lm - 1209lm
System watts	8W / 10W / 12W / 14W
Luminaire efficacy	up to 93lm/W
Colour deviation	3 SDCM
Colour rendition Index	>90
Correlated colour temperature	2700K / 3000K / 3500K / 4000K
Lumen maintenance	L90B10 89,000hours
Dimming method	Non dimm / DALI / Casambi
Optic	PMMA Clear Lens
Beam angle	13° / 25° / 34° / 54° / 80° / Oval / Asymmetric / Linear
Driver	Integral
Luminaire housing	Aluminium Powdercoated
Luminaire housing colour	Black / White / Custom
Luminaire baffle colour	Black / Custom
Custom body finishes	Custom powdercoat colour
Country of origin	Australia
Warranty	7 years

OPTIONAL ACCESSORIES



HONEYCOMB LOUVRE
FFL70.HONEYCOMB

Used to provide additional glare control in sensitive areas. Easily installed by placing behind the luminaire baffle.



SPECIALTY COLOUR FILTER
FPL70.COLOUR.XXX

High quality borosilicate glass filters for premium colourfast performance. Available in a selection of colours. Easily installed by placing behind the luminaire baffle. Only available with remote gear



XL BAFFLE
FPL70.XLB

A deep 17mm baffle to provide extra visual comfort in sensitive areas. Supplied in black as standard. Supplied in place of the standard baffle. Easily retrofitted by removing the existing baffle




HALO RING
FPL70.HALO

A discreet 7mm glowing ring attachment that emits a soft glowing light. Supplied in place of the standard baffle. Easily retrofitted by removing the existing baffle.



MONOPOINT
MONO.BLK
MONO.WH

Monopoint surface mount adapter. Suited to non dimmable and DALI dimmable versions. 140mm dia x 35mm deep

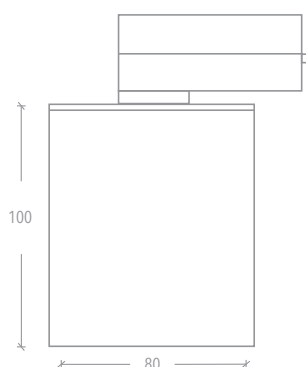

Product Variants

HOW TO SPECIFY

FIXED CCT

Select from the available options to configure luminaire

FTL70M	250	54	93	66	W
MODEL	OUTPUT	OPTIC	CRI CCT	DIMMING	LUMINAIRE HOUSING
FTL70M	200 8W - 743lm 250 10W - 865lm 300 12W - 1023lm 350 14W - 1209lm	13 13° 25 25° 34 34° 54 54° 80 80° OV OVAL 20°x60° AS ASYMMETRIC LN LINEAR	9 95+ 27 2700K 3 3000K 35 3500K 4 4000K	61 NON DIM 66 DALI 68 CASAMBI	W WHITE B BLACK X CUSTOM

Lumen outputs listed based on 4000K, 54degree option



Australian made like nothing **ELS_e**.