

FLEX 35 PENDANT | LENS

Premium miniature pendant for accent illumination



Product Description

Flex by name and Flex by design. The Flex 35 pendant luminaire is designed for accent illumination.

Presenting a sleek miniature size, the Flex 35 pendant features a deep baffle and optics that ensure exceptional glare control a cornerstone of ELS's design philosophy.

It is available with variable output technology to optimise performance to exact project requirements.

Product Details

Absolute luminous flux	385lm - 722lm
System watts	5W / 7W / 9W
Colour deviation	3 SDCM
Colour rendition Index	>90
Correlated colour temperature	2700K / 3000K / 3500K / 4000K
Cyanosis approval	4000K
Lumen maintenance	L90B10 60,000hours
Dimming method	Non dimm / DALI / Casambi
Optic	PMMA Clear Lens
Beam angle	19° / 24° / 33° / 51°
Luminaire housing	Aluminium
Luminaire housing colour	Black / White / Silver / Custom
Luminaire baffle colour	Black / White
Custom body finishes	Custom powdercoat colour
Suspension	Clear flex 1m
Country of origin	Australia
Warranty	7 years

SPECIFICATIONS



BLACK BAFFLE



WHITE BAFFLE


Product Variants

OPTIONAL ACCESSORIES CONT.



ROD KIT 500MM
ROD.KIT.500.B
ROD.KIT.500.W

An optional rod suspension kit to suit the Flex pendant range. Comes complete with 500mm rod and ceiling rose



ROD KIT 1000MM
ROD.KIT.1000.B
ROD.KIT.1000.W

An optional rod suspension kit to suit the Flex pendant range. Comes complete with 1000mm rod and ceiling rose



ROD KIT 1500MM
ROD.KIT.1500.B
ROD.KIT.1500.W

An optional rod suspension kit to suit the Flex pendant range. Comes complete with 1500mm rod and ceiling rose

OPTIONAL CLOTH FLEX



BLACK
3C.BLK
5C.BLK



GOLD
3C.GO
5C.GO



WHITE
3C.WH
5C.WH



YELLOW
3C.YL



ORANGE
3C.OR



RED
3C.RD



EMERALD
3C.EM




LIGHT BLUE
3C.LB

└─ 3 CORE OR 5 CORE ─┘

└────────── 3 CORE ONLY ─────────┘

TECHNICAL SPECIFICATIONS

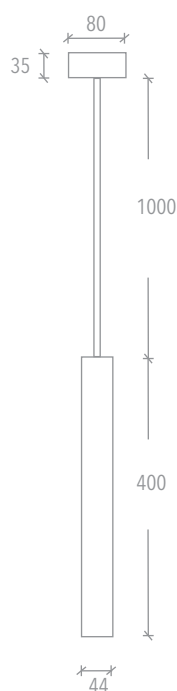

Product Variants HOW TO SPECIFY

FIXED CCT - 3000K/4000K

Select from the available options to configure luminaire

FPL35	200	33	93	66	W	WB
MODEL	OUTPUT	DISTRIBUTION	CRI CCT	DIMMING	COLOUR HOUSING	LUMINAIRE BAFFLE
FPL35	100 5W - 385lm 150 7W - 560lm 200 9W - 722lm	19 19° 24 24° 33 33° 51 51°	9 90+ 3 3000K 4 4000K	61 NON DIM 66 DALI 68 CASAMBI	W WHITE B BLACK X CUSTOM	WB WHITE BB BLACK XX CUSTOM

Lumen outputs listed based on 4000K, 33degree option

FIXED CCT - 2700K/3500K

Select from the available options to configure luminaire

FPL35	200	33	935	66	W	WB
MODEL	OUTPUT	DISTRIBUTION	CRI CCT	DIMMING	COLOUR HOUSING	LUMINAIRE BAFFLE
FPL35	100 5W - 423lm 150 7W - 617lm 200 9W - 799lm	25 25° 33 33° 47 47°	9 90+ 27 2700K 35 3500K	61 NON DIM 66 DALI 68 CASAMBI	W WHITE B BLACK X CUSTOM	WB WHITE BB BLACK XX CUSTOM

Lumen outputs listed based on 3500K, 33degree option



Australian made like nothing **ELS_e**.