

ICONIC 66 PENDANT

BLUETOOTH CONTROLLABLE LED PENDANT



- Xicato XIM Gen4 technology
- Bluetooth enabled
- Standard CRI 83+ or Artist high CRI 98
- 3000K, 4000K or 2700K upon request
- Machined aluminium body
- Feature wooden top
- High quality, mirror finish low glare reflector
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Made in Australia
- 1mtr standard drop
- Supplied with 48v integral power supply
- L70B0F0 at 55,000 hours

XIM GEN4 BLE 48V – 83+ CRI - LOW OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
ICP66.XBL48.N.83.66	ICP66.XBL48.N.83.67	28°	3000K	690	8.5
ICP66.XBL48.N.84.66	ICP66.XBL48.N.84.67	28°	4000K	690	8.5
ICP66.XBL48.N.83.66	ICP66.XBL48.M.83.67	36°	3000K	690	8.5
ICP66.XBL48.N.84.66	ICP66.XBL48.M.84.67	36°	4000K	690	8.5
ICP66.XBL48.W.83.66	ICP66.XBL48.W.83.67	55°	3000K	655	8.5
ICP66.XBL48.W.84.66	ICP66.XBL48.W.84.67	55°	4000K	655	8.5

XIM GEN4 BLE 48V – 83+ CRI - HIGH OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
ICP66.XB48.N.83.66	ICP66.XB48.N.83.67	28°	3000K	1150	14
ICP66.XB48.N.84.66	ICP66.XB48.N.84.67	28°	4000K	1150	14
ICP66.XB48.M.83.66	ICP66.XB48.M.83.67	36°	3000K	1042	14
ICP66.XB48.M.84.66	ICP66.XB48.M.84.67	36°	4000K	1042	14
ICP66.XB48.W.83.66	ICP66.XB48.M.83.67	55°	3000K	1092	14
ICP66.XB48.W.84.66	ICP66.XB48.M.84.67	55°	4000K	1092	14

XIM GEN4 BLE 48V – 98 CRI - LOW OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
ICP66.XBL48.N.93.66	ICP66.XBL48.N.93.67	28°	3000K	678	11
ICP66.XBL48.N.94.66	ICP66.XBL48.N.94.67	28°	4000K	678	11
ICP66.XBL48.M.93.66	ICP66.XBL48.M.93.67	36°	3000K	685	11
ICP66.XBL48.M.94.66	ICP66.XBL48.M.94.67	36°	4000K	685	11
ICP66.XBL48.W.93.66	ICP66.XBL48.W.93.67	55°	3000K	655	11
ICP66.XBL48.W.94.66	ICP66.XBL48.W.94.67	55°	4000K	655	11

XIM GEN4 BLE 48V – 98 CRI - HIGH OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
ICP66.XB48.N.93.66	ICP66.XB48.N.93.67	28°	3000K	1130	16
ICP66.XB48.N.94.66	ICP66.XB48.N.94.67	28°	4000K	1130	16
ICP66.XB48.M.93.66	ICP66.XB48.M.93.67	36°	3000K	905	16
ICP66.XB48.M.94.66	ICP66.XB48.M.94.67	36°	4000K	905	16
ICP66.XB48.M.93.66	ICP66.XB48.W.93.67	55°	3000K	895	16
ICP66.XB48.M.94.66	ICP66.XB48.W.94.67	55°	4000K	895	16

COLOURED FLEX



pink



white



black



green



blue



red



orange



yellow

COLOUR FINISH



white - WH



silver - SIL




black - BLK




custom powdercoat colour

PHOTOMETRICS

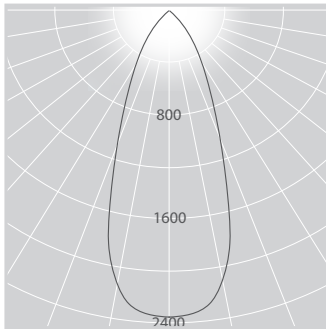

ICP66.XB48.M.83.67

DIMENSIONS

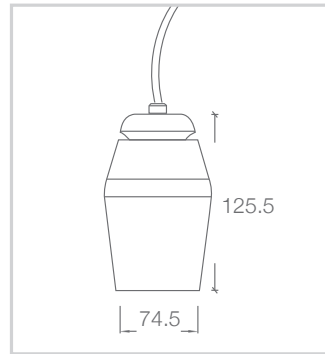

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

