

ADL150 WIDE BEAM DOWNLIGHT

BLUETOOTH CONTROLLABLE LED DOWNLIGHT



- Xicato XIM Gen4 technology
- Bluetooth enabled
- Standard CRI 83+ or Artist high CRI 98
- 3000K, 4000K or 2700K upon request
- Thin 2.5mm white polycarbonate trim
- High quality, mirror finish low glare reflector
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Made in Australia
- L70B0 at 55,000 hours
- Supplied with 48v remote power supply

XIM GEN4 BLE 48V – 83+ CRI - LOW OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
ADL150.XBL48.90.83.66	ADL150.XBL48.90.83.67	90°	3000K	1740	26
ADL150.XBL48.90.84.66	ADL150.XBL48.90.84.67	90°	4000K	1740	26

XIM GEN4 BLE 48V – 83+ CRI - HIGH OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
ADL150.XB48.90.83.66	ADL150.XB48.90.83.67	90°	3000K	2490	37
ADL150.XB48.90.84.66	ADL150.XB48.90.84.67	90°	4000K	2490	37




XIM GEN4 BLE 48V – 98 CRI - LOW OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
ADL150.XBL48.90.93.66	ADL150.XBL48.90.93.67	90°	3000K	1740	30
ADL150.XBL48.90.94.66	ADL150.XBL48.90.94.67	90°	4000K	1740	30

XIM GEN4 BLE 48V – 98 CRI - HIGH OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
ADL150.XB48.90.93.66	ADL150.XB48.90.93.67	90°	3000K	2490	43
ADL150.XB48.90.94.66	ADL150.XB48.90.94.67	90°	4000K	2490	43

COLOUR FINISH

-  white - WH
-  silver - SIL
-  black - BLK

OPTIONAL ACCESSORIES

Frosted glass inlay IP44**
Order code - SDL150-G4



Vandal resistant lens
Order code - SDL150-VR




Clear glass inlay IP44**
Order code - SDL150-G5



**IP Rating is from below the ceiling only

DIMENSIONS

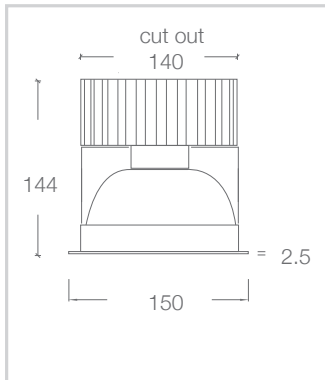

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

